



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Flue

WS-W36406

**PRODUCT DESCRIPTION**


Fundamental geometry. An opaque triangular shade shelters LED light sources, providing downward illumination while protecting the nighttime sky.

**FEATURES**

- ACLED driverless technology
- Downward illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, ADA
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-5%, TRIAC: 100-10%
<b>Mounting</b>	Can be mounted on wall vertically or upside down
<b>Color Temp</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with silk screened diffuser

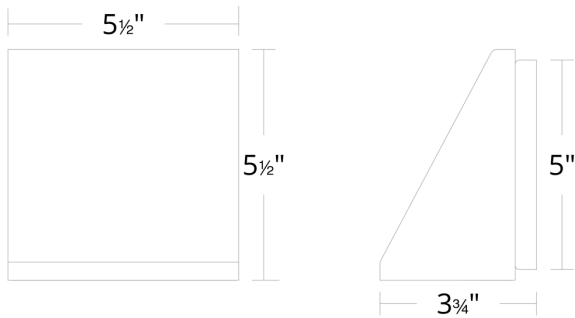

WS-W36406

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W36406 6"	2700K	BK Black	12.1W	1000	320
	3000K	BK Black	12.1W	1000	320
	3500K	BK Black	12.1W	1000	320
	4000K	BK Black	12.1W	1000	320

Example: **WS-W36406-40-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)